

KAIXI Heating Panel



XPS Underfloor Heating Foam Panel

H-6/10/12/20/30/40/50/60/80/100

Features /特点



SUPERIOR WATERPROOF
隔热防水防火一体




DURABLE
耐用性能强



Strong adaptability
高性能



Save energy
节约能源

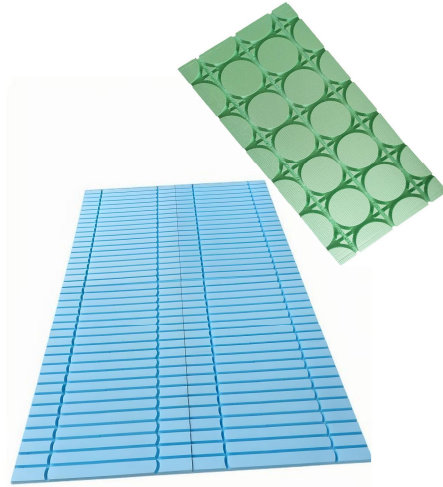

Advantages of KAIXI XPS Underfloor Heating Panels

- ① High-performance 300kPa foam boards ($\lambda=0.033W/m\cdot K$) for flooring, highways, cold storage, and hotels.
- ② Custom Solutions
Available in 600/900/1200mm widths + custom lengths/colors (blue/green/special).
- ③ Multi-Functional
Combines thermal insulation, waterproofing, fire resistance, and soundproofing.
- ④ Full Support
5+ year warranty with technical guidance, installation support, and replacement services.

凯希XPS地暖板的优点:

- ① 高性能泡沫板（抗压强度300kPa/导热系数0.033W/m·K），适用于地暖、高速公路、冷库及酒店保温。
- ② 定制服务
标准宽度600/900/1200mm，支持定制长度与颜色（蓝/绿/专属色）。
- ③ 多功能特性
集隔热、防水、防火、隔音于一体。
- ④ 全面保障
5年以上质保，提供技术指导、安装支持与更换服务。
高分子和耐用性

Specification

Material	Polystyrene	材质	聚苯乙烯
Type	XPS underfloor heating foam board	名称	XPS地暖保温板
Usage	bathroom,kitchen,underfloor,wall	适用场地	浴室，厨房，地板，墙壁,隔断
Material	XPS	材质	XPS
Surface Type	Smooth,Planing,Grooving,Embossing	表面类型	平滑，策划，槽，压花
Function	Heat insulation / waterproof / fireproof / sound proof	功能	热绝缘 / 防水 / 防火 / 防风
Compress Strength	Min.300KPa	压缩力量	最少.300KPa
Place of Origin	Guangdong China	原产地	中国广东
Application	wall and floor waterproof and insulation, electric underfloor heating etc	适用范围	墙壁和地板防水和隔热层，地板地板加热等
Thermal conductivity	0.033 W(m.k)	导热率	0.033 W(m.k)
Density	32±0.02 Kg/m3 +	密度	32±0.02 Kg/m3 +
Length(cm)	120/122/180/240/600/customized	长度（厘米）	120/122/180/240/600/customized
Width(cm)	30/60/100/120cm/customized	宽度（厘米）	30/60/100/120cm/customized
Thickness(mm)	4-100mm / 0.16"-4"	厚度（毫米）	4-100mm / 0.16"-4"

Description

Extruded polystyrene foam board, referred to as Extrusion board, also known as XPS board. It is especially suitable for insulation, heat preservation and moisture-proof treatment of buildings. It is one of the construction materials with low price and good quality in construction industry. The most advanced CO2 foaming technique which assure FREE-CFC and FREE-Bromide production and the whole production line is based on environmental protection.

描述

挤出的聚苯乙烯泡沫板，称为挤塑板，也称为XPS板。它特别适用于建筑物的隔热，保存和防水处理。LT是建筑业价格低廉和质量高质量的建筑材料的一部分。确保自由CFC和自由溴生产和整个生产线的最具壮强的二氧化碳泡沫技术是基于环境保护。



pressure-stable and rigid



waterproof



lightweight



design variety



environmentally friendly



economical



insulating



easy to install



alternative surfaces

CONTACT US

Get your customized solution now:

Email: info@ledsunwell.com ☎ +86-20-34528055 / +86-13902321538